


LINIA 3535 TALPI 300

9005 3000K/CRI80 on/off

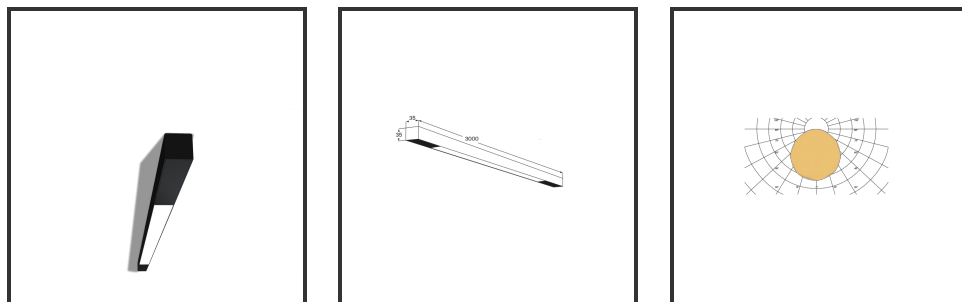

CIE Flux Codes	49 80 95 99 100	IK	07
Colour Deviation (SDCM)	3 sdc	Input current	650mA
Colour Temperature	3000K	Led type	SMD
Max. connected Load	70W	Lumen Maintenance	L80B10 bij 50.000
Connected Voltage	220-240V	Lumen/W	100lm/W
CRI	85	Luminous flux of luminaire	7000lm
Dim	No	Material Housing	Aluminium
Dimensions	3000x35x35	Material Lens/Reflector/Diffusor	PMMA
ENEC	Ja	Mounting Type	Ceiling
Energy Efficiency Class	D	Color	RAL9005
Forward Voltage	105V	PF	0,98
Frequency	50-60Hz	Protection Class	I
Glow Wire Test	650°C	UGR	<25
		Weight	0,75kg/m

Reference : 000013440

Product Description

Rectangular linear lighting with strategically placed blinding covers. A unique light emission is obtained through the blinding covers. This surface-mounted luminaire enhances the room in the most efficient way. Available in ceiling and pendant mounting. Available in 3000K or 4000K. Dimensions: 3004x35x35. Standard on/off. Dimmable in dali, dali push, triac and 1-10V. Driver internal. Available in RAL9005, RAL9010, RAL9016 and aluminium