


LINIA 3535 TALPI 300 SUSPENSION

9005 3000K/CRI80 on/off

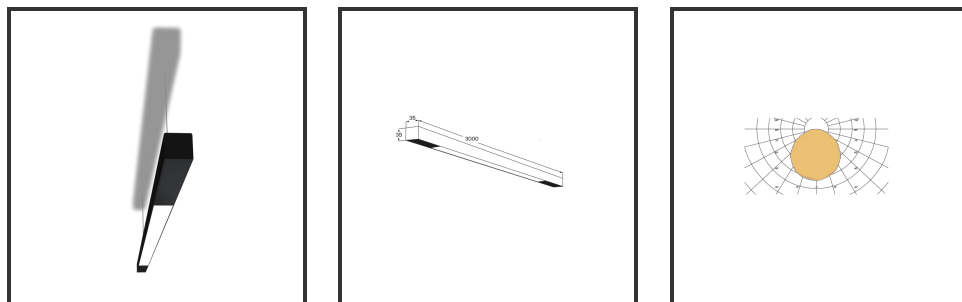

CIE Flux Codes	49 80 95 99 100	Input current	650mA
Colour Deviation (SDCM)	3 sdcn	Led type	SMD
Colour Temperature	3000K	Lumen Maintenance	L80B10 bij 50.000
Max. connected Load	70W	Lumen/W	100lm/W
Connected Voltage	220-240V	Luminous flux of luminaire	7000lm
CRI	85	Material Housing	Aluminium
Dim	No	Material Lens/Reflector/Diffusor	PMMA
Dimensions	3000x35x35	Mounting Type	Suspension
ENEC	Ja	Color	RAL9005
Energy Efficiency Class	D	PF	0,98
Forward Voltage	105V	Protection Class	I
Frequency	50-60Hz	Suspension Length	1,5m-4m
Glow Wire Test	650°C	UGR	<25
IK	07	Weight	0,75kg/m

Reference : 000013472

Product Description

Rectangular linear lighting with strategically placed blinding covers. A unique light emission is obtained through the blinding covers. This surface-mounted luminaire enhances the room in the most efficient way. Available in ceiling and pendant mounting. Available in 3000K or 4000K. Dimensions: 3004x35x35. Standard on/off. Dimmable in dali, dali push, triac and 1-10V. Driver internal. Available in RAL9005, RAL9010, RAL9016 and aluminium