


EREA 10

9016 4000K/CRI80 Dali push

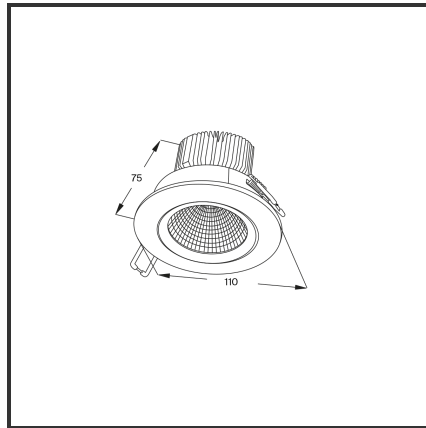

Beamangle	60°	Led type	SMD
CIE Flux Codes	90 98 99 95 100	Lumen Maintenance	L80B10 bij 50.000
CRI	80	Lumen/W	135lm/W
Colour Deviation (SDCM)	3 sdcM	Luminous flux of luminaire	1000lm
Colour Temperature	4000K	Material Housing	Diecast aluminium
Cut Out Dimensions	ø95	Material Lens/Reflector/Diffusor	Aluminium
Dim	Dali push	Max. connected Load	10W
Dimensions	Ø110x75	Mounting Type	Inbouw
Energy Efficiency Class	D	PF	0,9
Forward Voltage	33V	Protection Class	I
Frequency	50-60Hz	Recess Depth	75
IK	03	Rotation angle	30°
IP	IP54	UGR	<19
Input current	300mA	Voltage	220-240V
Kleur	RAL9016	Weight	350g

Product Description

De iconische inbouwspot, is de allrounder van de inbouwspots. De meest flexibele downlighter is gekend door de gekende stijl, no-nonsense design en **hoge functionaliteit**. Door de ultieme uitstraling creëert de Erea een ultieme koopbeleving in de **retail**. Breed toepasbaar van residentieel tot commercieel gebruik. De Erea is beschikbaar in **vijf types**: 6W (Afmetingen: 90x72, inbouw: ø75), 10W (Afmetingen: 110x75, inbouw: ø95), 15W (Afmetingen: 130x96, inbouw: ø120), 20W (Afmetingen: 138x96, inbouw: ø120), 30W (Afmetingen: 160x109, inbouw: ø140). Beschikbaar in 3000K of 4000K. Standaard aan/uit. Dimbaar in dali, dali push, triac en 1-10V. Deze downlighter is beschikbaar in RAL9005 en RAL9016.

Reference : 000002560