

Architecturele verlichting

Lijnverlichting



Linia 5470 v2

115-140-170-230-280

9005, 9010, 9016 & aluminium
plafond, wand & pendel
2700k-3000k-4000k
maatwerk

Argus - Oculi - Setto - Talpi



48v systeem




Linia 3535

120-180-240-300

9005, 9010, 9016 & aluminium
plafond, inbouw & pendel
3000k-4000k
maatwerk

Argus - Oculi - Setto - Talpi



Quadra

60-120

9005, 9010, 9016 & aluminium
wan, plafond & pendel
3000k-4000k


Quadra v



Linia 1932

56-84-115-140

9005, 9010, 9016 & aluminium
opbouw, inbouw & pendel
PMMA/louvre/SAPP
3000k-4000k
externe driver



Linia 2932

56-84-115-140-168-196

9005, 9010, 9016 & aluminium
opbouw, inbouw & pendel
prisma/louvre/SAPP
3000k-4000k
uplight mogelijk
externe driver



Mamba

120-150

pendel & rozette
2700k-3000k-4000k
maatwerk

Stribe - Kups



Rule

58-115

zwart & wit
2700k-3000k-4000k



Versed 48v

9005, 9010, 9016,
goud & koper
2700k-3000k-4000k
12°, 24°, 36° & 55°

Track verlichting



Okko

10-20-30

9005, 9010, 9016,
goud, koper & aluminium
2700k-3000k-4000k
23°, 36° & 60°



Oqqu

10-20-30

9005, 9010, 9016,
goud, koper & aluminium
2700k-3000k-4000k
23°, 36° & 60°




Wink track

9005, 9010, 9016,
goud, chrome, zilver
& chrome zwart
2700-3000k-4000k
15°, 24°, 38° & 50°



Versed track

9005, 9010, 9016,
goud & koper
2700k-3000k-4000k
12°, 24°, 36° & 55°



Heli

78-108

9005, 9010, 9016,
& aluminium
3000k-4000k

Argus - Oculi



Verlichting Armaturen



Kali

9005, 9016, goud,
chrome, aluminium &
chrome zwart
bladveren & gyprocveren
2700k-3000k-4000k
15°, 24°, 38° & 50°



Mira

9005, 9016 & aluminium
rond & vierkant
zwart, aluminium & wit
bladveren of gyprocveren




Obi

9005 & 9016
bladveren



Obi O



Obi OD



Tania

9005 & 9016
2700k-3000k-4000k




Thali

9005 & 9016
2700k-3000k-4000k



Tina

9005 & 9016
2700k-3000k-4000k



Oculi

9005, 9010, 9016
& aluminium
3000k-4000k
15°, 25° & 45°




Argus

9005, 9010, 9016
& aluminium
3000k-4000k
12°, 34° & 48°




Glow

45-60-90-120
9005 & 9016
plafond of pendel
uplight mogelijk
3000k-4000k



Ring

60-90-120
9005 & 9016
plafond of pendel
uplight mogelijk
3000k-4000k

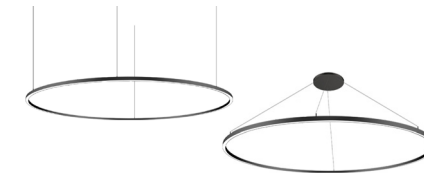

Circle

80-120-150-300
9005, 9010 & 9016
pendel of rosette
2700k-3000k-4000k



Akoestische circle

80-120-150
9005, 9010 & 9016
pendel of rosette
2700k-3000k-4000k



Zaro

zwart & wit
rail, profiel & rosette
2700k



Okko in

10-20-30
9005, 9010, 9016,
goud, koper & aluminium
2700k-3000k-4000k
23°, 36° & 60°



Wink

9005, 9010, 9016, goud, chrome,
aluminium & chrome zwart
2700k-3000k-4000k
15°, 24°, 38° & 50°
inbouw of opbouw



on triple



on duo



Versed

9005, 9010, 9016, goud & koper
2700k-3000k-4000k
12°, 24°, 36° & 55°
inbouw of opbouw



on duo



Versed suspended

10-15-20
lengtes
9005, 9010, 9016, goud & koper
2700k-3000k-4000k
12°, 24°, 36° & 55°

Functionele verlichting

LED panelen



Flatline

6060 12030
inbouw
30w-36w
3000k-4000k



Lightplate 6060 v2

25w-33w-40w
inbouw
3000k-4000k



FL Rond

145-180-240
300-600

FL Vierkant

2020
3030

inbouw
9005 & 9016
3000k-4000k



FLO Rond

180-240-300
400-600

Flo Vierkant

180-240
300-400

opbouw
9005 & 9016
3000k-4000k
240/300 & 600

Sensor & nood



Disq

340x100
opbouw
HFB of HF
3000k



Tmod H

36-60
opbouw
3000k-4000k
sensor en/of
nood

Retrofit



Gu10 pro

60°
2700k-3000k
4000k
6.5w

Armaturen




Bold

10-25-35
opbouw
9005 & 9016
3000k-4000k



Down

16-25
inbouw
9005 & 9016
3000k-4000k



Erea

6-10-15-20-30
inbouw
9005 & 9016
3000k-4000k



Luxor

12-20-30-40
inbouw
9005 & 9016
3000k-4000k

Industrie



Flood

20-30-50-70
outdoor
3000k-4000k



Flow

100-150
outdoor
4000k

Industrie



Klok

100-150-200
indoor & outdoor
3000k-4000k
reflector of transparante kap



Stadion

40-80-120-200-280-400
outdoor
3000k-4000k-5000k
60°, 120°, 30x60° & 90x100°



Tmod SCCT 18

24w-42w
opbouw
outdoor
4000k



Trunk

modulair opbouw systeem
opbouw of pendel
blindplaat of lichtmodule
wit
optie sensor & nood
narrow/wide/flood/
assym. single/assym. double



T-line

3 fase - 3 fase pulse
opbouw of pendel
160lm/w
3000k-4000k
wide
wit