


MAMBA STRIBE 120 PENDEL

9010 Copper 4000K/CRI90 Dali push

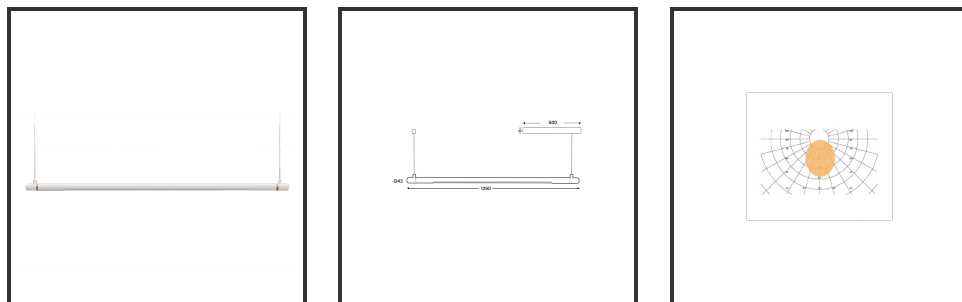

Beamangle	120	IP	IP33
CIE Flux Codes	49 80 95 99 100	Color	RAL9010
Colour Deviation (SDCM)	3 sdc	Color 2	Copper
Colour Temperature	4000K	Led type	SMD
Max. connected Load	25W	Lumen Maintenance	L80B10 bij 50.000
Connected Voltage	220-240V	Lumen/W	135lm/W
CRI	90	Luminous flux of luminaire	2500lm
Dim	Dali push	Material Housing	Aluminium
Dimensions	Ø42x1590	Material Lens/Reflector/Diffusor	PMMA
Energy Efficiency Class	D	Mounting Type	Suspension
Forward Voltage	31,5V	PF	0,98
Frequency	50-60Hz	Protection Class	II
IK	07	Suspension Length	1,5m
Input current	700mA	UGR	<23

Reference : 000029626

Product Description

The Mamba also combines the most Lednlux recognizable roundings found elsewhere within our range. Together with a subtle look and straightforwardness. A clever piece of design work that is best expressed as a statement piece in the midst of everyone's interior. What the mamba is mainly about are the modular magnetic coupling modules implemented in each component. By combining this with a 48V system and the latest LED technologies, we were able to keep the power supply so low that a slim design did not present any development problems. Due to the dynamics between the magnetic coupling modules, all components can be rotated 360° around its axis as well as individually rotated 180° horizontally, allowing the end to become the beginning. Configuring a mamba fixture is done entirely and only at your request. From a sleek fixture above your dining table to a composition that results in virtually endless combination possibilities.