
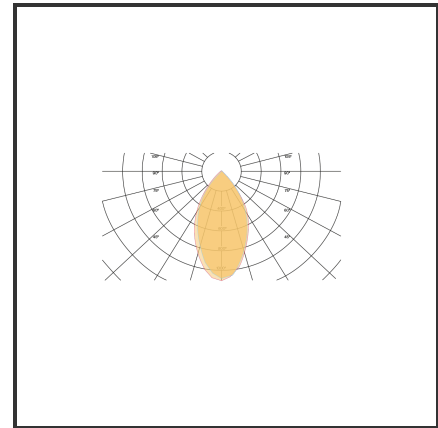


EREA 6

9005 4000K/CRI80 1-10V

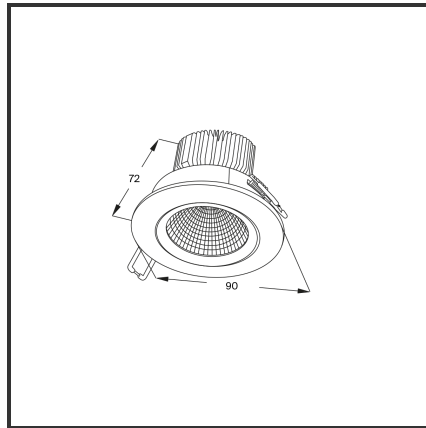

| | | | |
|-------------------------|-----------------|----------------------------------|-------------------|
| Beamangle | 60° | Kleur | RAL9005 |
| CIE Flux Codes | 90 98 99 95 100 | Led type | SMD |
| CRI | 80 | Lumen Maintenance | L80B10 bij 50.000 |
| Colour Deviation (SDCM) | 3 sdcm | Lumen/W | 135lm/W |
| Colour Temperature | 4000K | Luminous flux of luminaire | 600lm |
| Cut Out Dimensions | ø75 | Material Housing | Diecast aluminium |
| Dim | 1-10V | Material Lens/Reflector/Diffusor | Aluminium |
| Dimensions | Ø90x72 | Max. connected Load | 6W |
| Energy Efficiency Class | D | Mounting Type | Inbouw |
| Forward Voltage | 30V | PF | 0,9 |
| Frequency | 50-60Hz | Protection Class | I |
| IK | 03 | Recess Depth | 72 |
| IP | IP54 | UGR | <19 |
| Input current | 200mA | Voltage | 220-240V |
| | | Weight | 300g |

Product Description

De iconische inbouwspot, is de allrounder van de inbouwspots. De meest flexibele downlighter is gekend door de gekende stijl, no-nonsense design en **hoge functionaliteit**. Door de ultieme uitstraling creëert de Erea een ultieme koopbeleving in de **retail**. Breed toepasbaar van residentieel tot commercieel gebruik. De Erea is beschikbaar in **vijf types**: 6W (Afmetingen: 90x72, inbouw: ø75), 10W (Afmetingen: 110x75, inbouw: ø95), 15W (Afmetingen: 130x96, inbouw: ø120), 20W (Afmetingen: 138x96, inbouw ø120), 30W (Afmetingen: 160x109, inbouw: ø140). Beschikbaar in 3000K of 4000K. Standaard aan/uit. Dimbaar in dali, dali push, triac en 1-10V. Deze downlighter is beschikbaar in RAL9005 en RAL9016.

Reference : 000002628